




## INSTALLATION & PROGRAMMING GUIDE FOR



**FORTIN®**

## **RFK-411 REMOTE TRANSMITTER KIT**

### PARTS INCLUDED



ANT-FMH-2W  
ANTENNA



2x RM411  
REMOTES



ANTENNA  
CABLE

This guide will show you how to connect the RFK-411 add-on RF remote transmitter kit to an EVO-ALL that is installed in a vehicle using a T-Harness that DOES have a built in blue female 4-pin antenna plug and does not use a separate remote start controller.

### STEP 1. VERIFY BASIC EVO-ALL OPERATION

Before beginning the RF remote kit installation, it is best to verify basic operation of your EVO-ALL. Your installation tip sheet will show you the vehicle wiring & programming procedure for your EVO-ALL. This must be completed before adding the RF remote kit. After completing the vehicle programming procedure your OEM remotes should be able to remote start the vehicle.

IF OPTION AVAILABLE. To remote start the vehicle with the factory key fob :



**PRESS LOCK 3 TIMES** (By default)  
or **PRESS LOCK UNLOCK LOCK.**


Remote-start the vehicle.

\*In some vehicles, the lock information is not present as a data signal. If the blue light does not flash on your EVO-ALL when you press the lock button on your OEM remote after successful vehicle programming, then the EVO-ALL does not detect the lock information from the vehicle CAN data bus. If the lock data information is not present in your vehicle, then just make sure the vehicle programming procedure gave the expected light flashes and proceed with the RF remote kit installation.


\*\*Some vehicles do not come with OEM remotes. If your vehicle did not come with OEM remotes, then just make sure the vehicle programming procedure gave the expected light flashes and proceed with the RF remote kit installation.

## STEP 2. INSTALL THE ANTENNA

The antenna mast should be mounted at the top of the interior side of windshield.

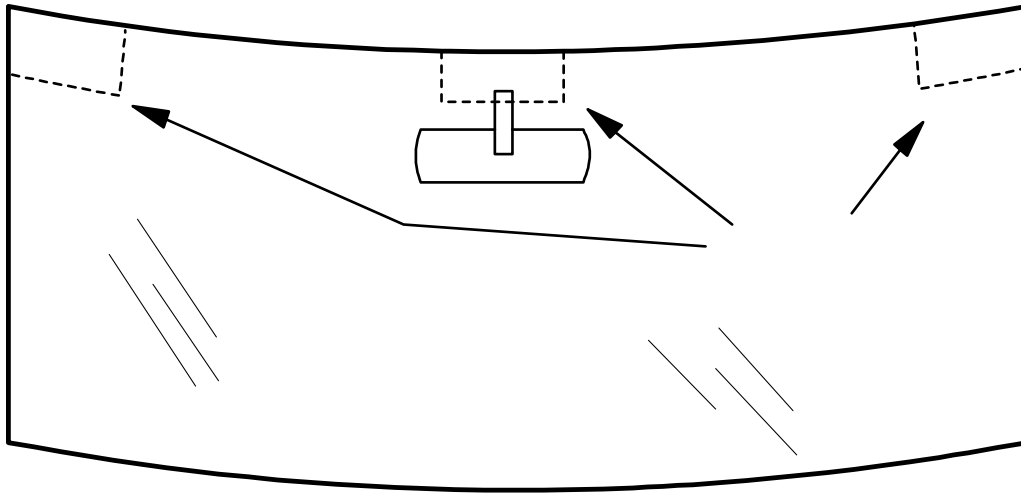


Tuck the antenna wire into the headliner, as you route it towards the driver side "A" pillar. Then tuck the wire into the "A" pillar as you route it down towards the driver side under dash area or wherever your EVO-ALL module is located.

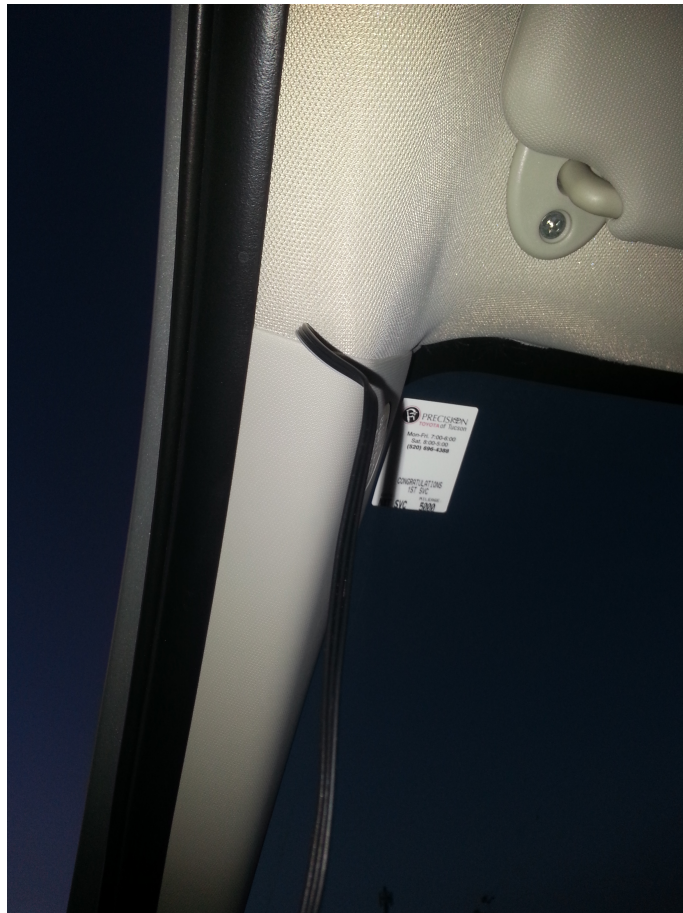


### STEP 3. MAKE THE CONNECTIONS

Your T-harness will have a black male 4-pin data link connector (with locking tab) that is not connected to anything, and a black male 4-pin data link connector (without locking tab) that is connected to your EVO-ALL brain. It will also have a blue female 4-pin plug to accept the antenna cable.

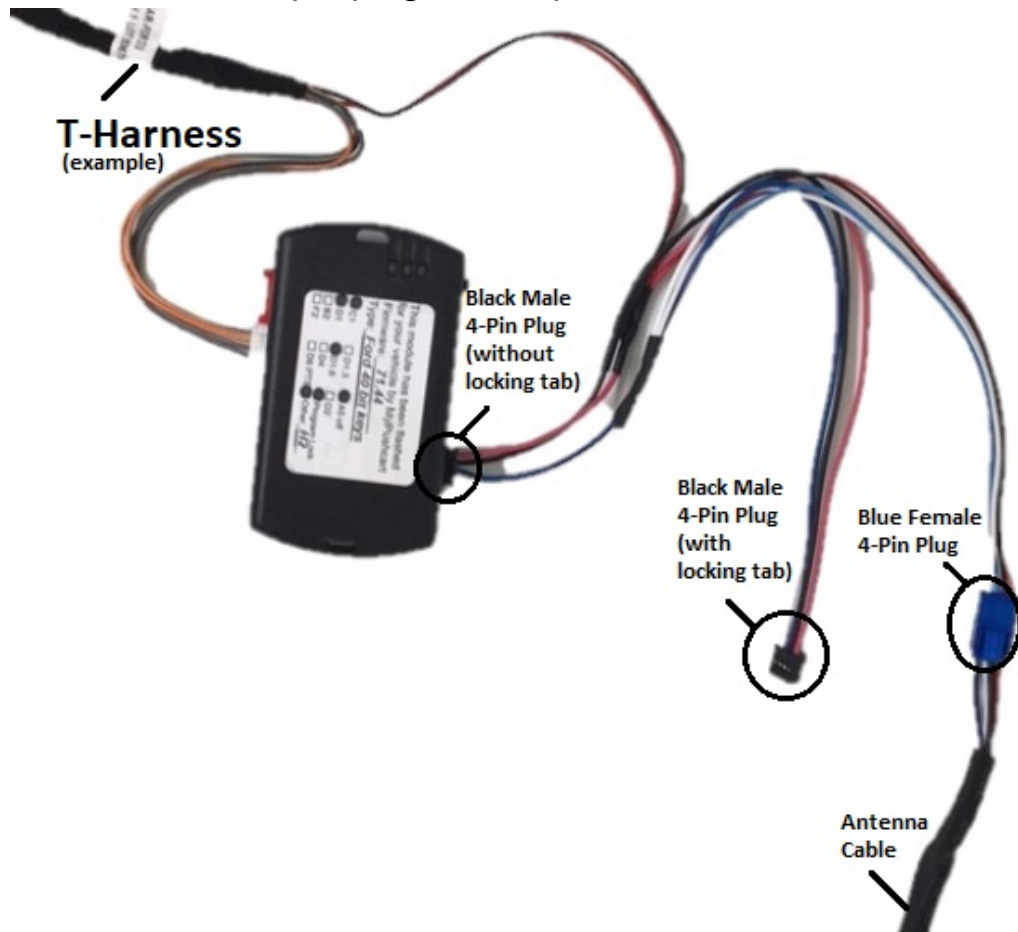


Locate the blue female plug that is built into your T-harness, and connect the blue male 4-pin antenna plug to it.

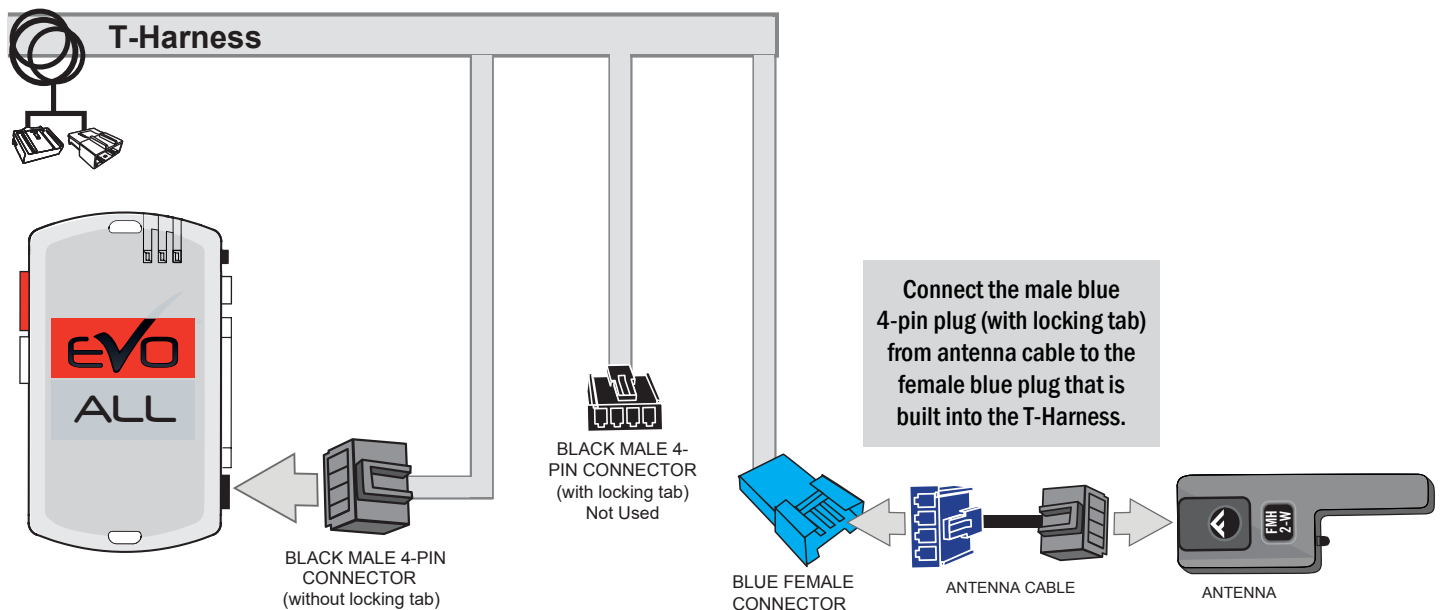

## STEP 4. REMOTE PROGRAMMING


Once your connections are made, you will need to program your remote transmitters to sync with your EVO-ALL. Perform the following steps:

1



**Begin with the 4 Pin (Data-Link) connector unplugged from the EVO-ALL module.**


2

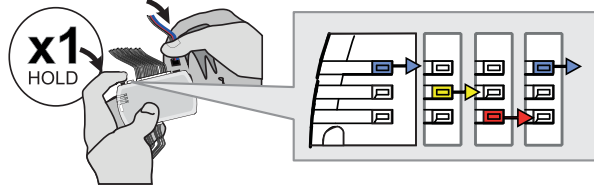

**Press and hold** the programming button as you insert the black male 4-Pin plug (without locking tab) from the RFA2A adapter.

The LEDs will begin to cycle between the colors


3

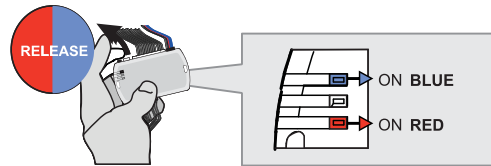

**Release** the programming button at the moment when the LEDs are BLUE & RED.


*If the LED are not solid BLUE and RED disconnect the 4-Pin connector (Data-Link) and go back to step 1.*

4

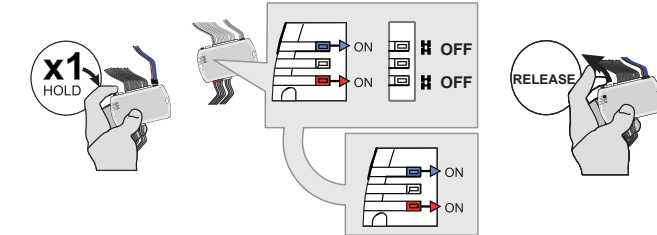

**Press and hold** the programming button. The BLUE and RED LEDs will turn Off. **Wait** until the BLUE and RED LEDs turn back ON, **then release the button**


5

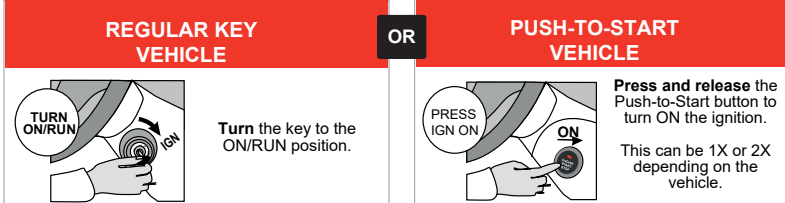

**Turn ignition on.**

The YELLOW LED will turn on along with the BLUE and RED.


The antenna will flash rapidly.

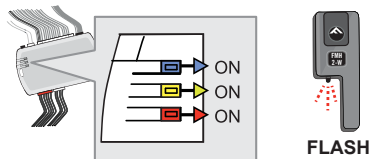


6

RM411




On each Transmitter Press and **HOLD the**  button for **12 SECONDS**. **WAIT** for the LED to **TURN ON SOLID** then **release**.



The BLUE and RED LEDs will flash once each time to confirm.

7

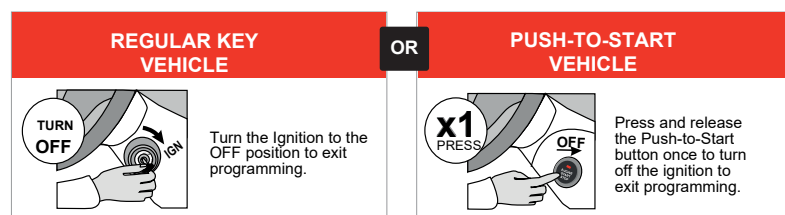

**Turn Ignition OFF.**

The EVO-ALL LEDs will turn Off.


**The remotes are now programmed.**



## STEP 5. TEST THE SYSTEM

Once programming is complete, test the remotes for operation.

### USING THE REMOTE CONTROL

RM411	press	seconds	COMMAND	DESCRIPTION
	<b>1x</b>	0.5 seconds	<b>LOCK</b>	Press the button 1x (0.5 seconds) : Locks all doors.
	<b>2x</b>	0.5 seconds	<b>UNLOCK</b>	Press the button 2x (0.5 seconds): Un-locks all doors.
	<b>1x</b>	3 seconds	<b>START OR STOP</b>	Press and hold the button for 3 seconds: Remote-start the vehicle. If the engine is ON : the engine will turn OFF.

### REMOTE-STARTING THE VEHICLE

STEP 1



To remote-start the vehicle press the START button for approximately 3 second.

STEP 2



The vehicle ignition will turn on to indicate a response to the Remote-Start signal.

STEP 3






Approximately 5 seconds later the engine will crank. Once the vehicle starts the parking lights will turn on and remain on for the entire duration of the Remote-Starter runtime, or until the Remote-Starter is shut down.






If the EVO-ALL fails to start the vehicle on the first attempt, it will wait 3 seconds before it will attempt to start the vehicle again. The Remote-Starter will attempt to start the vehicle 2 times (default) before giving up. When a EVO-ALL fails to remote start, it will flash its red light a number of times as a diagnostic to tell you why it failed.


### EVO-ALL REMOTE START DIAGNOSTICS


RED Light flashes (after Shutdown) :

2x	Normal stop (Brake, Park Brake)
3x	No tachometer signal detected
4x	Ignition On
5x	Hood open

KEY TAKEOVER FOR STANDARD KEY VEHICLE	
STEP 1	 <p>Do not press the foot brake (the engine will shut down).</p>
STEP 2	 <p>Insert the key into the ignition and turn to ON position.</p>
STEP 3	 <p>Press the foot brake.</p>

KEY TAKEOVER FOR PUSH-TO-START FORD / HYUNDAI / INFINITI / KIA / MAZDA / NISSAN / SUBARU*	
STEP 1	 <p>Enter the vehicle with the SMART-KEY.</p>
STEP 2	 <p>Do not press the foot brake.</p>
STEP 3	 <p>Press the Push-to-Start button 1x or 2x to turn ignition on.</p>
STEP 4	 <p>Press the foot brake.</p>
STEP 5	 <p>The vehicle can now be put in to gear and driven. If the Smart-Key is not detected the vehicle will shut down.</p>

KEY TAKEOVER FOR PUSH-TO-START ACURA/HONDA/LEXUS / SCION TOYOTA *	
STEP 1	<p>The module will shut down the vehicle as soon as the drivers door is opened.</p>
OFF	

KEY TAKEOVER FOR PUSH-TO-START AUDI / BMW / CHRYSLER / GMC*	
STEP 2	 <p>Press the foot brake.</p>
STEP 3	<p>The vehicle can now be now be put in to gear and driven.</p> 